

# 深圳市宇畅达电子有限公司

## 承认书

### SPECIFICATION FOR APPROVAL

客户名称:

Customer Name : \_\_\_\_\_

客户料号:

Customer P/N: \_\_\_\_\_

产品名称:

功率电感

Product Name: \_\_\_\_\_

宇畅达料号:

SNR8040TYD-系列

Yuchangda P/N: \_\_\_\_\_

制造厂商 Manufacturer	
拟制 Draft	黄小香
审核 Check	符妃团
日期 Date	2018-6-6

客户承认印章 Approval Signet	
日期 Date	

地址:深圳市光明区玉塘街道光明高新园侨德科技园A座9楼.

Address:9th Floor, Block A, Qiaode Science and Technology Park, Guangming High-tech Park, Yutang Street, Guangming District, Shenzhen


电子邮件 E-mail: wyf\_ycd@163.com



文件编号 File Number	YCD-WI-3638	版本号 Version Number	A	页码 page	1/4
---------------------	-------------	-----------------------	---	------------	-----

### 1、外形尺寸 Dimension :

单位Unit: mm

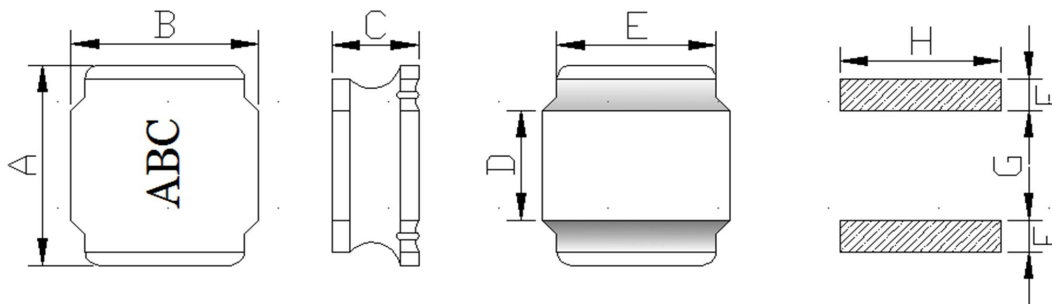

A	8.00±0.3
B	8.00±0.3
C	4.2Max.
D	3.5±0.3
E	6.3Ref
F	2.5Ref
G	3.4Ref
H	7.5Ref


### 2、产品品名构成 Product Spec. Model

**SNR 8040T Y D - 2R2 N**


a b c d e f

- a: 系列名称 Series name
- b: 产品尺寸 Product dimensions (A x B x C)
- c: 密封方式 Sealing way (L: 冷封 Cold seal Y: 热封 Heat seal)
- d: 印字方向 Lettering direction ▶
- e: 电感值 Inductance Value  
(1R0:1.0uH; 100: 10uH; 101:100uH)
- f: 电感公差 Inductance Tolerance (K:10% ; M:20% ; N:30%)

#### ▶ Lettering direction

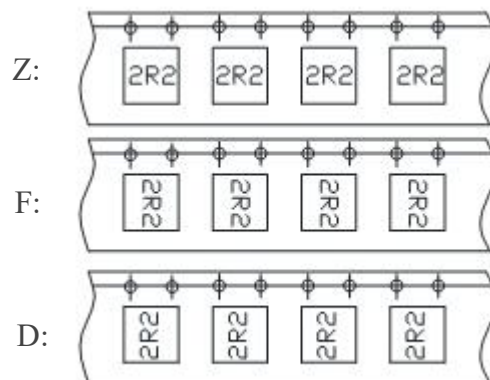

### 3、结构 Structure

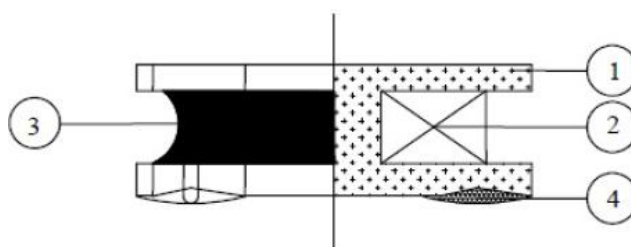

### 4、材料清单 MATERIAL LIST

NO.	PARTS	MATERIAL	UL FILE NO.	TEMP. CLASS
1	DRUM CORE	Ni-Zn CORE OR EQUIVALENT	NA	NA
2	WIRE	POLYURETHANE ENAMELLED COPPER WIRE OR EQUIVALENT	E258243	180°C
3	ADHESIVE	EPOXY RESIN OR EQUIVALENT	NA	NA
4	SOLDER	Sn99.3-Cu0.7 OR EQUIVALENT	NA	NA

\*NA:NOT APPLICABLE.

文件编号 File Number	YCD-WI-3638	版本号 Version Number	A	页码 page	2/4
---------------------	-------------	-----------------------	---	------------	-----

## 5、电性能参数表 Electrical Characteristics List

规格型号 Part NO.	电感量 Tolerance( $\mu$ H)	测试频率 Test Freq. (kHz/v)	直流电阻 DC Max ( $\Omega$ )	饱和电流 Isat (A)	温升电流 Irms (A)
SNR8040TYD-1R0N	1.0	100/0.25	0.010	9.85	6.30
SNR8040TYD-1R5N	1.5	100/0.25	0.013	8.15	5.65
SNR8040TYD-2R2N	2.2	100/0.25	0.016	7.10	5.15
SNR8040TYD-2R6N	2.6	100/0.25	0.016	7.10	5.10
SNR8040TYD-3R3N	3.3	100/0.25	0.022	6.50	4.40
SNR8040TYD-3R6N	3.6	100/0.25	0.022	7.52	4.35
SNR8040TYD-3R9N	3.9	100/0.25	0.022	5.75	4.35
SNR8040TYD-4R7N	4.7	100/0.25	0.025	5.90	4.10
SNR8040TYD-5R6N	5.6	100/0.25	0.027	6.00	3.85
SNR8040TYD-6R8M	6.8	100/0.25	0.031	4.55	3.60
SNR8040TYD-8R2M	8.2	100/0.25	0.034	4.20	3.45
SNR8040TYD-100M	10	100/0.25	0.038	3.60	3.30
SNR8040TYD-120M	12	100/0.25	0.053	3.50	2.80
SNR8040TYD-150M	15	100/0.25	0.061	2.95	2.60
SNR8040TYD-180M	18	100/0.25	0.069	2.70	2.40
SNR8040TYD-220M	22	100/0.25	0.090	2.40	2.10
SNR8040TYD-270M	27	100/0.25	0.101	2.15	2.00
SNR8040TYD-330M	33	100/0.25	0.126	2.05	1.80
SNR8040TYD-390M	39	100/0.25	0.139	1.95	1.70
SNR8040TYD-470M	47	100/0.25	0.177	1.75	1.55
SNR8040TYD-510M	51	100/0.25	0.185	1.70	1.50
SNR8040TYD-680M	68	100/0.25	0.255	1.45	1.25
SNR8040TYD-820M	82	100/0.25	0.293	1.30	1.15
SNR8040TYD-101M	100	100/0.25	0.377	1.15	1.00
SNR8040TYD-121M	120	100/0.25	0.434	1.05	0.95
SNR8040TYD-151M	150	100/0.25	0.533	1.10	0.85
SNR8040TYD-181M	180	100/0.25	0.676	0.95	0.83

※公差Tolerance: N: $\pm$ 30%、M: $\pm$ 20%、K: $\pm$ 10%.

※工作温度Operating temperature rang: -40  $^{\circ}$ C to +125 $^{\circ}$ C (Including Self-heating)

※储存温度Storage temperature rang: -40  $^{\circ}$ C to +125 $^{\circ}$ C


额定电流: 指使电感量比初始值下降30%或电感器表面温度上升 40 $^{\circ}$ C的电流值 (参考周围环境温度 25 $^{\circ}$ C)。

The rated DC current is that which cause at 30% inductance reduction from the initial value or inductor surface temperature to rise by 40 $^{\circ}$ C, whichever is smaller (Reference ambient temperature 25 $^{\circ}$ C)。




## 6、产品包装 Packaging

### 1) 载带包装示意图 Tape packing diagram

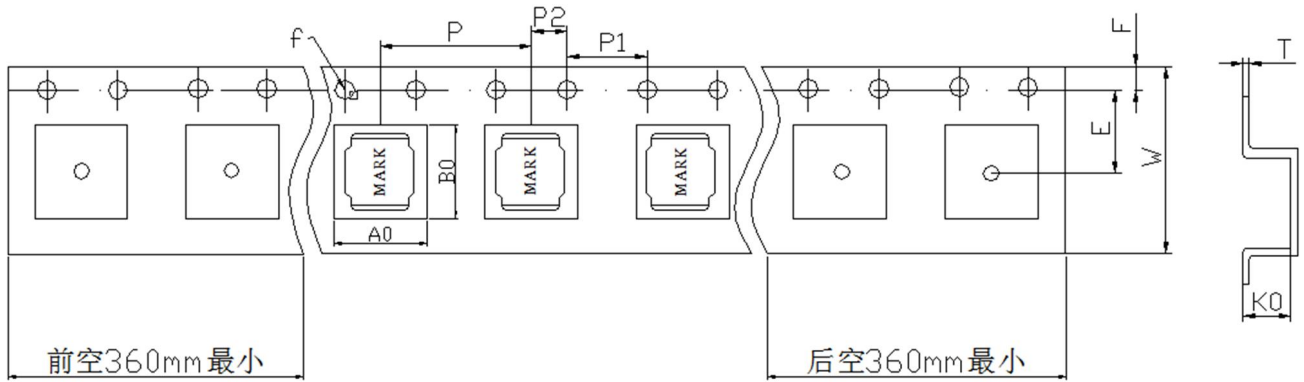


ITEM	W	A0	B0	K0	P	E	F	D0	P0	P2	T
DIM	16.00	8.40	8.40	4.50	12.00	7.50	1.75	1.50	4.00	2.00	0.40
TOLE	±0.3	±0.1	±0.1	±0.1	±0.1	±0.1	±0.1	+0.1	±0.1	±0.1	±0.05

### 2) 卷盘包装示意图 Tape packing diagram

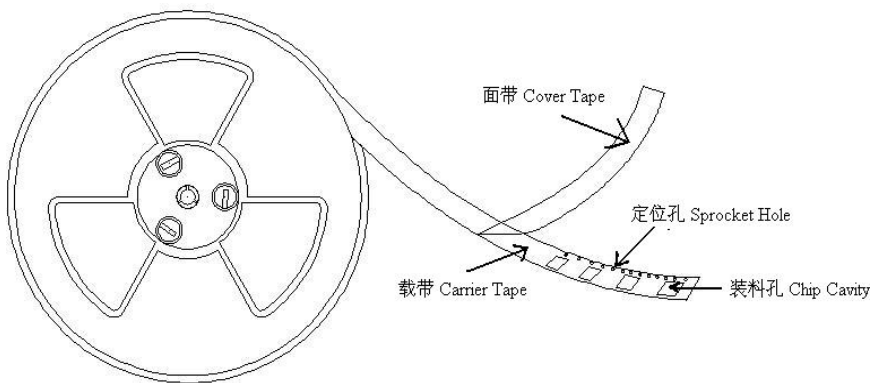

### 3) 剥离强度要求 Peeling required

- ① F 力大小: 20~100g;
- ② 面带剥离角度: 165°~180°。

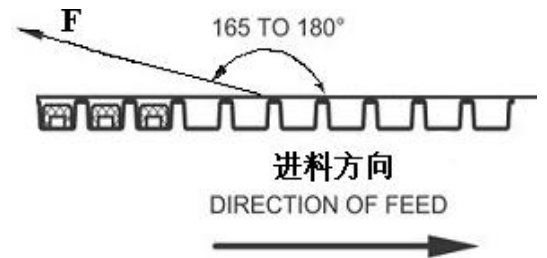

### 4) 包装数量 Packing quantity

项目	数量 (PCS)	尺寸规格 (mm)
盘	1000	13"
内盒	3000	340mm*340mm*65mm
外箱	6000	360mm*360mm*160mm